

# **NETL Life Cycle Inventory Data Process Documentation File**

**Process Name:** SRWC Cultivation, Operation **Reference Flow:** 1 kg of biomass, operation

**Brief Description:** This unit process includes operation period farming activities

for cultivation of SRWC, including inputs of combusted diesel, fertilizers, herbicides and water use, as well as

criteria air pollutants, and water emissions.

Section I: Meta Data								
<b>Geographical Covera</b>	ge: US		Region:	Midwest				
Year Data Best Repre	<b>esents:</b> 2007							
<b>Process Type:</b>	Extra	ction Pro	ocess (EP)					
Process Scope: Cradle		e-to-Gat	e Process (CG)					
<b>Allocation Applied:</b>	No							
Completeness:	All Re	levant F	lows Recorded					
Flows Aggregated in	Data Set:							
Process			☐ Energy P&D		Material P&D			
<b>Relevant Output Flov</b>	vs Included in Da	ta Set:						
Releases to Air: Sereenhouse Gas		ises		llutants 🗌	Other			
Releases to Water:   Inorganic Emiss		sions	Organic Emiss	ions	Other			
Water Usage:   Water Consumpt		ption	ion 🗵 Water Demand (throughput)					
Releases to Soil: Inorganic Release		ases	Organic Release	ses 🗌	Other			
Adjustable Process P	arameters:							
SRWC Yield per year (yield_ratio_y)		Represents the mass of short rotation woody crop (SRWC) produced annually.						
Nitrogen Fertilizer (Fertilizer_N)		Amount of nitrogen applied via fertilizer annually, per acre.						
Phosphorus Fertilizer (Fertilizer_P)			nt of phosphorus ap er annually, per ac	•				
Potassium Fertilizer (Fertilizer_K)			nt of potassium app er annually, per act					



# **NETL Life Cycle Inventory Data Process Documentation File**

# **Tracked Input Flows:**

Biomass Operation [Installation] This unit process is assembled with

SRWC land preparation operations

process in series.

Amount of diesel combusted within the Diesel Combustion, Mobile Sources,

Truck [Refinery products] mobile source.

Equipment Assembly per kg Biomass Amount of farm equipment required for

[Valuable substances] 1 kg of biomass.

N Fertilizers [Inorganic intermediate Amount of nitrogen fertilizer used in products]

production of 1 kg of biomass ready for

harvest.

P Fertilizers [Inorganic intermediate

products]

Amount of phosphorus fertilizer used in production of 1 kg of biomass ready for

harvest.

K Fertilizers [Inorganic intermediate

products1

Amount of potassium fertilizer used in production of 1 kg of biomass ready for

harvest.

## **Tracked Output Flows:**

Biomass Operation [Installation] This unit process is assembled with the biomass

harvesting operation unit process therefore the reference flow is assumed to be 1 kg biomass

operation.

# **Section II: Process Description**

#### **Associated Documentation**

This unit process is composed of this document and the data sheet (DS) DS Stage1 O SRWC Cultivation 2010.03.xlsx, which provides additional details regarding calculations, data quality, and references as relevant.

## **Goal and Scope**

The scope of this unit process covers the operations of farming activities used for cultivation for short rotation woody crop (SRWC) biomass in Life Cycle (LC) Stage #1. This unit process is based on the reference flow of 1 kg of biomass operation, as described below and in **Figure 1.** The mass of diesel to power farming equipment, mass of fertilizer and herbicides, and related emissions are calculated based on the reference flow. Considered are the mass consumption of diesel, consumption of nitrogen, phosphorus and potassium (NPK) fertilizer, consumption of herbicide,



particulate matter emissions associated with fugitive dust, water input flows required for biomass cultivation, runoff water, and emissions of criteria air pollutants. The energy and material flows for the upstream production and delivery of diesel as well as LC emissions of diesel production and combustion are not included in the boundary of this process.

## **Boundary and Description**

The LC boundary of this unit process starts with the seeding of biomass and ends with SRWC ready for harvest. Operating activities for the cultivation of SRWC are based on the production of 1 kg of SRWC biomass operation activities. The replanting cycle is assumed to be every 5 years.

SRWC is planted once every 5 years and harvested at the end of the fifth year. For planting, three passes are made across the field: 2 passes for tilling and 1 pass for planting. The SRWC is fertilized each year using N, P, and K fertilizers, and is sprayed with an herbicide each year. Water is supplied to the SRWC via a combination of rainfall and irrigation water, with the irrigation water being a 50%-50% mix of surface water and groundwater. Energy required for the application of fertilizers, herbicides, and application of water is assumed to be negligible.

Diesel is consumed by the tractor as it pulls the disc tiller and the planter equipment. A tractor consumes diesel an average of 10.26 gallons per hour (John Deere 2009a). The diesel consumption of equipment used in farming cultivation activities was calculated based on specifications of a 1,953 rpm tractor.

The width of a disk tiller is 4.77 m (15.7 ft) (John Deere 2009b). The tractor with a tiller implement has an average operating speed of 5.8 miles per hour (mph) (Tillage 2009). By multiplying the width of the disk tiller by the speed of the tractor, a land coverage rate of 11 acres per hour is calculated. The tractor makes two passes over the site, requiring 1.86 gal/acre of diesel.

The width of a planter is 2.39 m (7.83 ft) (C&G 2004). The tractor with a planter has an average operating speed of 4 miles per hour (mph) (Tillage 2009). By multiplying the width of the planter and speed of the tractor, a land coverage rate of 3.8 acres per hour is estimated. The tractor planter makes a single pass of the land site. The ratio of the fuel consumption rate and land coverage rate is a diesel consumption rate of 2.7 gal/acre. This unit process assumes that the engine of the tractor is greater than 175 horsepower.

The emissions for the required amount of diesel combusted for this process are accounted for in an upstream diesel combustion process. That process is pulled as an input to this process. The impacts associated with the manufacturing of the cultivation equipment are accounted for in a separate unit process. This process scales the manufacturing processes based on the amount of biomass demanded.

Fugitive dust emissions are generated by the disturbance of surface soil during tilling. Planting and other activities involving farm equipment (such as applying fertilizers and herbicides) are assumed to generate insignificant levels of fugitive dust compared to



tilling. Fugitive dust emissions from tilling are estimated using an emissions factor specified by WRAP (Western Regional Air Program) (Countess Environmental 2004), which conducted air sampling studies on ripping and sub-soiling practices used for breaking up soil compaction. The emissions factor for fugitive dust is 1.2 lb PM10/acrepass. The tractor makes two passes of the site during tilling and thus has a fugitive dust emissions factor of 2.4 lbs PM10/acre. Replanting is assumed to take place every 5 years and horizon time of the study is assumed to be 30 years. Multiplying the replanting time and dividing by the horizon time, the total emissions of fugitive dust are 0.2177 kg PM10/acre-year calculated. The ratio of PM2.5 to PM10 utilized for this study is 0.15 kg PM2.5/kg PM10.

Fertilizer use quantifies the amounts of nitrogen, phosphorous, and potassium required, while herbicide use is quantified in support of weed control. The mass of fertilizer was calculated (RAND 2009), but upstream emissions for fertilizer production and delivery are not included in the boundary of this unit process. Approximately 10 percent (by weight) of the nitrogen that is applied as fertilizer is assumed to be volatilized. Of that volatized nitrogen fertilizer, it is further assumed that 1 percent reacts to form  $N_2O$  and 5 percent forms  $NH_3$  and  $NO_x$  respectively. Of the 90 percent of nitrogen fertilizer that does not volatize, soil processes release 0.0125 tons of  $N_2O$  per ton of nitrogen.

Biomass production for this study is assumed to occur in the Midwestern United States, a region where rain during the growing season contributes substantially to the water requirements of crops (DOC 2009). However, in many cases, supplemental irrigation water is also used to support increased yield and to relieve crop water stress during dry periods. As a result, quantifying water use and consumption for biomass crops grown in the Midwest is relatively complicated as compared to, for instance, biomass crops grown in the West, where growing season irrigation is the only significant source of water (SFP 2007). Based on Midwest rainfall average data, 17,300 m<sup>3</sup>/acre is estimated. Water is applied as rainfall or as irrigation water from a combination of surface water and groundwater sources. Runoff water occurs as a result of excess rainfall, and agricultural pollutants, including nitrogen and phosphorous emissions, associated with stormwater runoff are quantified (USDA 2009). Total irrigation water is estimated to be 135 mm/year (Brown, R. et al. 2000) based on the difference between the total evapotranspiration demand for the crop and the amount of rainfall. Total runoff water is assumed to be 17 mm/year based on data from Brown et al. (2000) and is calculated to be 70,314 liters per acre per year.

Loss of nitrogen and phosphorous via runoff water is also accounted for within the unit process. Waterborne nitrogen and phosphorous emissions are based on a study completed by Mallarino et al (2009), which provides survey data for agricultural runoff water, in order to quantify nutrient loss from fields. Anticipated nutrient loading rates were calculated by averaging data provided for a conventional nutrient management scheme.

Carbon dioxide (CO<sub>2</sub>) uptake is quantified based on available carbon content data for SRWC. CO<sub>2</sub> uptake is calculated stoichiometrically from the amount of carbon contained






in SRWC, assuming that all carbon was originally taken up as CO<sub>2</sub>. The average carbon fraction of SRWC is assumed to be 52.36 percent on a dry basis (NETL 2012).

Four adjustable process parameters are included in this unit process. These are designed to allow modeling flexibility to enable the modeler to update the unit process to meet specific assumptions and study criteria, as relevant. Additionally, these values may be updated as needed to incorporate newer or revised data sources. The annual yield rate represents the annual yield of SWRC per acre in a year. NETL currently recommends a default value of 6,214 kg/acre-year for this parameter (NETL 2011). N, P and K fertilizers indicate the amount of these fertilizers used per acre. NETL currently recommends default values of 70.3 kg-N/acre, 9.5 kg-P/acre and 47.2 kg-K/acre for nitrogen, phosphorous and potassium, respectively.

**Figure 1** shows the boundaries of this unit process and sub-processes, and the flows of sub-processes. The figure includes processes directly related to the growing of SRWC, as well as upstream processes that account for fertilizer production, diesel production, water, and other agricultural inputs. Upstream processes may require energy or other ancillary substances, but for the purposes of this discussion the figure does not show other flows. Rectangular boxes represent relevant upstream processes, while trapezoidal boxes indicate upstream data that are outside of the boundary of this unit process. As shown, upstream emissions associated with the production and delivery of technosphere inputs (nitrogen, phosphorus, potassium (NPK) fertilizer & diesel profiles) fuel are accounted for outside of the boundary of this unit process.

Properties of SRWC biomass cultivation operation activities relevant to this unit process are illustrated in **Table 1**. Heating values for SRWC are provided as a reference point to document assumptions and for comparison with other biomass types applied outside of this unit process, as relevant. **Table 2** provides a summary of modeled input and output flows. Additional details regarding input and output flows, including calculation methods, are contained in the associated DS sheet.



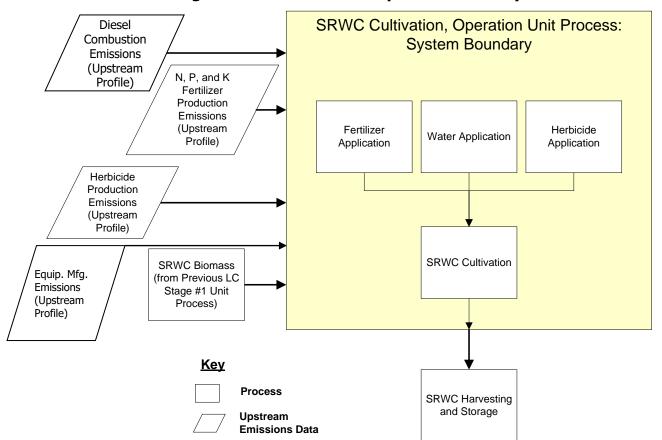

**Figure 1: Unit Process Scope and Boundary** 

**Table 1: Properties of Biomass Cultivation Operation Activities** 

Property	Value	Units
SRWC yield	6214	kg/acre-year
SRWC LHV at 50% moisture	3969	Btu/lb
SRWC HHV at 50% moisture	4219	Btu/lb

**Table 2: Unit Process Input and Output Flows** 

Flow Name*	Value	Units (Per Reference Flow)	DQI			
Inputs						
Biomass Operation [Installation]	1	kg	2,2			
Diesel Combustion, Mobile Sources, Truck [Refinery products]	4.69E-04	kg	2,2			
Equipment Assembly per kg Biomass [Valuable substances]	1.00E+00	Pieces	2,2			
N Fertilizer [Inorganic intermediate products]	1.13E-02	kg	2,2			
P Fertilizer [Inorganic intermediate products]	1.53E-03	kg	2,2			
K Fertilizer [Inorganic intermediate products]	7.60E-03	kg	2,2			
Herbicide Use (Diuron) [Inorganic intermediate products]	2.19E-04	kg	2,2			
Water (ground water) [Water]	4.39E+01	L	2,2			
Water (surface water) [Water]	4.39E+01	L	2,2			
Water (storm) [Water]	3.56E+02	L	2,2			
Outputs						
Biomass Operation [Installation]	1	kg	2,2			
Carbon dioxide (biological) [Inorganic emissions to air]	-9.60E-01	kg	2,2			
Nitrous oxide (laughing gas) [Inorganic emissions to air]	1.63E-04	kg	2,2			
Ammonia [Inorganic emissions to air]	5.66E-04	kg	2,2			
Nitrogen oxides [Inorganic emissions to air]	5.66E-04	kg	2,2			
Dust (PM10) [Particles to air]	3.50E-05	kg	1,2			
Dust (PM2.5) [Particles to air]	5.26E-06	kg	1,2			
Nitrogen [Inorganic emissions to fresh water]	3.57E-05	kg	2,2			
Phosphorus [Inorganic emissions to fresh water]	3.78E-08	kg	2,2			
Water (storm runoff) [Water]	1.13E+01	L	2,2			

<sup>\*</sup> **Bold face** clarifies that the value shown *does not* include upstream environmental flows. Upstream environmental flows were added during the modeling process using GaBi modeling software, as shown in Figure 1.

Inventory items not included are assumed to be zero based on best engineering judgment or assumed to be zero because no data was available to categorize them for this unit process at the time of its creation.

#### **Embedded Unit Processes**

None.

#### References

Brown et al. 2000

Brown, R. *et al.* 2000. "Potential production and environmental effects of switchgrass and traditional crops under current and greenhouse-altered climate



***	
NEIL	

in the central United States: a simulation study." *Agriculture, Ecosystems, and Environment* 78:31-47.

Countess Environmental 2004 Countess Environmental. 2004. WRAP Fugitive Dust

Handbook. WGA Contract No. 30204-83. Western

Regional Air Partnership.

DOC 2009 Department of Conservation. 2009. U.S. Midwest

Average Rainfall, 1971-2000. U.S. Department of

Conservation.

www.ncdc.noaa.gov/oa/climate/online/ccd/nrmpcp.txt

(Accessed January 28, 2010).

Federal Register 2004 Federal Register. 2004. Part II: Environmental

Protection Agency: 40 CFR Parts 9, 69, et al. Control of Emissions of Air Pollution from Nonroad Diesel Engines and Fuel; Final Rule. National Archives and

Records Administration.

John 2009a John Deere, 2009, John Deere Model 7830 165 PTO

hp (Manufacturer Specifications). Deere & Company.

John 2009b John Deere. 2009. *John Deere Model 425 Disk Harrow* 

Wheel Type Offset (Manufacturer Specifications).

Deere & Company.

NETL 2011 NETL. (2011). Calculating Uncertainty in Biomass

Emissions Model, Version 2.0 (CUBE 2.0): Model and Documentation. (DOE/NETL-2012/1538). Pittsburgh, PA: National Energy Technology Laboratory, from

http://www.netl.doe.gov/energy-

analyses/refshelf/PubDetails.aspx?Action=View&PubI

P=409

NETL 2012 NETL. (2012). Greenhouse Gas Reductions in the

Power Industry Using Domestic Coal and Biomass Volume 2: Pulverized Coal Plants. (DOE/NETL-2012/1547). Pittsburgh, PA: National Energy

Technology Laboratory, from http://www.netl.doe.gov/energy-

analyses/refshelf/PubDetails.aspx?Action=View&Sour

So=Main&PubId=426

Ney et al. 2002 Mallarino, A. et al. 2009. Biomass Harvest and

Nutrient N-P Management Impacts on Nutrient Loss

From Fields. Department of Agronomy and

Agricultural and Biosystems Engineering, Iowa State

University. Presentation.



## **NETL Life Cycle Inventory Data – Process Documentation File**

RAND 2009 RAND. 2009. RAND Analytical Biomass Model. RAND

Corporation.

SFP 2007 Southeast Farm Press. 2007. *It takes a lot of water to* 

grow a corn crop. Penton Media, Inc. Dec. 28, 2007.

Stolarski 2008 Stolarski, M. 2008. "Content of Carbon, Hydrogen,

and Sulphur in Biomass of Some Shrub Willow Species." *Journal of Elementology* 13(4):655-663.

Tillage 2009 Tillage Answers. 2009. *Tillage* 

Calculators.www.tillageanswers.com/tandem\_calculat

or.cfm (Accessed February 2, 2010).

USDA 2009 USDA. 2009. Fact Sheet: Management and Lifecycle

Assessment of Bio-energy Crop Production. U.S.

Department of Agriculture.

#### **Section III: Document Control Information**

**Date Created:** February 02, 2010

**Point of Contact:** Timothy Skone (NETL), Timothy.Skone@NETL.DOE.GOV

**Revision History:** 

13JUNE2012 Updated to revised parameter values.

29DECEMBER2014 Updated to reflect combustion removal. Diesel

combustion is now an input. Added inventory item level DQI data to the data summary tab. Added NH<sub>3</sub> and NO<sub>x</sub> emissions to air from N-fertilizer application.

Speciated fugitive dust PM emissions.

**How to Cite This Document:** This document should be cited as:

NETL (2010). *NETL Life Cycle Inventory Data – Unit Process: SRWC Cultivation, Operation.* U.S. Department of Energy, National Energy Technology Laboratory. Last Updated: December 2014 (version 03). www.netl.doe.gov/energy-analyses

(http://www.netl.doe.gov/energy-analyses)



#### **Section IV: Disclaimer**

Neither the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) nor any person acting on behalf of these organizations:

- A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe on privately owned rights; or
- B. Assumes any liability with this report as to its use, or damages resulting from the use of any information, apparatus, method, or process disclosed in this document.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by NETL. The views and opinions of the authors expressed herein do not necessarily state or reflect those of NETL.